




## FLAME ARRESTER

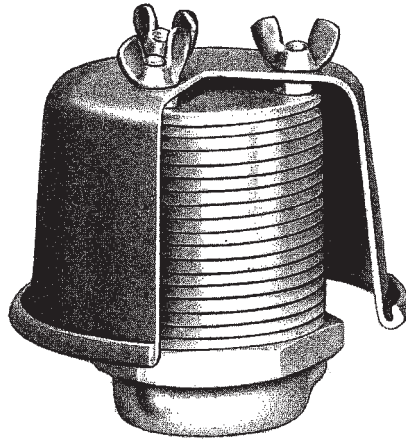

Series 670

Series 6670

**IMPORTANT** - Before installation or servicing, make sure line is free of flammable or hazardous vapor.

### Installation

1. Remove all protective packing.
2. Install unit, using suitable wrench on body flats to tighten.
3. Unit is ready for service.

### Maintenance

1. Remove unit from installation.
2. Remove wing nuts on weatherhood. Remove weatherhood.
3. Inspect grid plates, blow out loose dirt and immerse in suitable solvent to dissolve gums and deposits. **IMPORTANT: DO NOT DISASSEMBLE GRID ASSEMBLY.**
4. Reassemble weatherhood and wing nuts. Tighten wing nuts securely.
5. Reinstall unit, using suitable wrench on body flats to tighten.

